


To use roms with multiple/interesting chip selects:
 you can drive both target /ce and target /oe together with one output of a '138
 The output of the 138 you use depends on how many of each polarity chip select you need
 you can use up to 4 positive enables and 2 ngative or,
 up to 5 negative enables and one positive

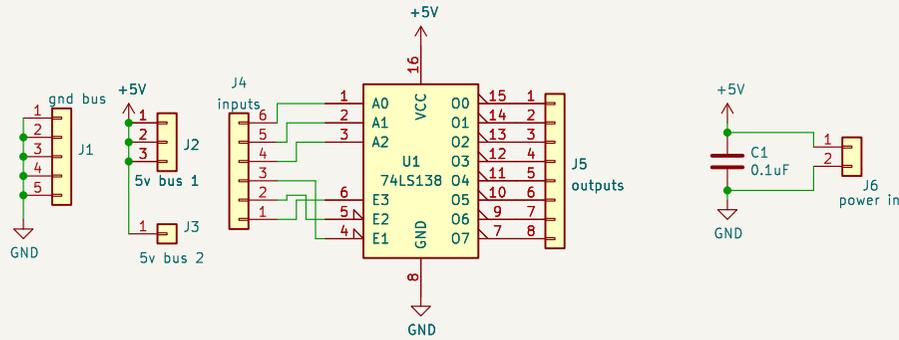

Sheet: /
 File: chip select multiplexer.kicad_sch

Title:

Size: A4
 KiCad E.D.A. 9.0.0

Date:

Rev:
 Id: 1/1