



INPUT FROM HIGH AMP PCB






VOLTAGE DIVIDER FROM 24V TO 3.3V

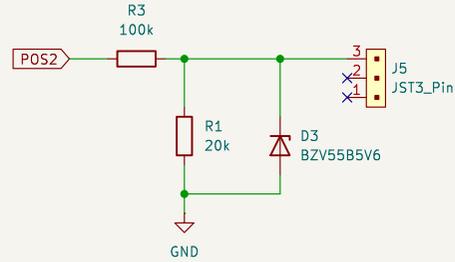

Voltage range of lipo 6s : 28 – 25.2 V
 Safe range of chip input voltage : 2.1 – 5.3 V
 Range obtained from voltage divider : 3.0 – 4.2 V
 Zener diode breakdown voltage : 5.6 V

E_STOP, SELECTOR AND DEL

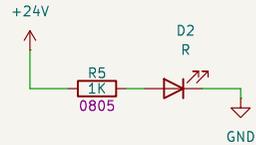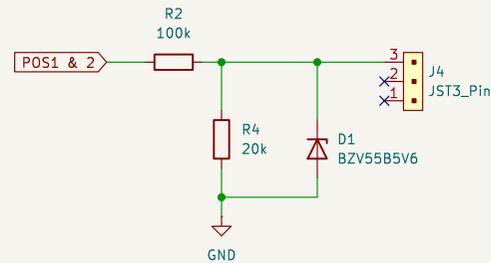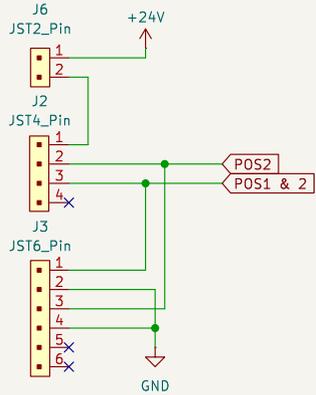

PHR-2	PHR-3
PHR-3	PHR-4
PHR-6	



Sheet: /
 File: Selector.kicad_sch

Title:

Size: A4
 KiCad E.D.A. 9.0.0

Date:

Rev:

Id: 1/1